




Mini Load Retriever[®]

Mini Load Retrievers precisely handle and position loads up to 750 lb.

This retriever meets the needs of component, sub-assembly, kitting, and work-in-process buffering for modern factory operations.

System control software packages are available for semi-automated or fully automated warehousing distribution operations.

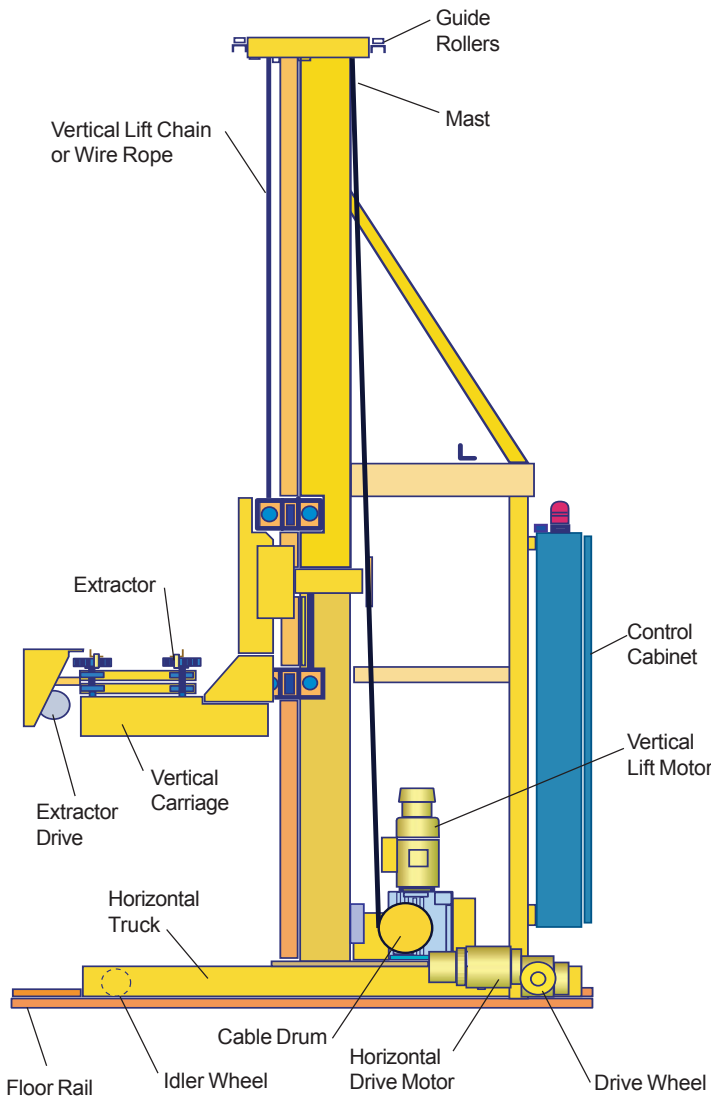

Webb offers a full line of custom designed or standard modular design automated storage and retrieval machines.

Retriever[®] is a registered trademark of Jervis B. Webb Company.



Standard Retriever Specifications:

Load Capacity

Max. weight 750 lb
 Typical load size 24" x 48" *

Retriever Specifications

Max. height 40 ft
 Max. horizontal speed 600 fpm
 Max. vertical speed 120 fpm
 Max. shuttle speed 150 fpm
 Acceleration/deceleration 2.0 ft sec

Vertical drive variable AC motors
 Horizontal drive variable AC motors
 Type of hoist wire rope or double chain
 Type of extractor pin or shuttle
 Power supply 480V, 60HZ, 3PH
 On board controller PLC

* Custom sizes available upon request

Jervis B. Webb Company
 MATERIAL HANDLING SYSTEM SPECIALISTS



34375 West Twelve Mile Road
 Farmington Hills, MI 48331 USA
 1-248-553-1257 FAX: 1-248-553-1238
 www.jervisbwebb.com